


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>G08G 1/123</b>		<b>A1</b>	(11) International Publication Number: <b>WO 96/31859</b>
			(43) International Publication Date: 10 October 1996 (10.10.96)
(21) International Application Number: <b>PCT/US96/04509</b> (22) International Filing Date: 2 April 1996 (02.04.96) (30) Priority Data: 08/416,186 4 April 1995 (04.04.95) US (71) Applicant (for all designated States except US): INTERNATIONAL STANDARD ELECTRIC CORPORATION [US/US]; Suite 1217, 1105 North Market Street, Wilmington, VA 19801 (US). (72) Inventor; and (75) Inventor/Applicant (for US only): HERTEL, Richard, J. [US/US]; 6643 Quail Ridge Lane, Fort Wayne, IN 46084 (US). (74) Agent: PLEVY, Arthur, L.; Plevy & Associates, 146 Route 1 North, P.O. Box 1365, Edison, NJ 08818-1366 (US).			(81) Designated States: AU, BR, CA, CN, JP, KR, MX, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> With international search report.

(54) Title: APPARATUS AND METHOD FOR MONITORING AND BOUNDING THE PATH OF A GROUND VEHICLE

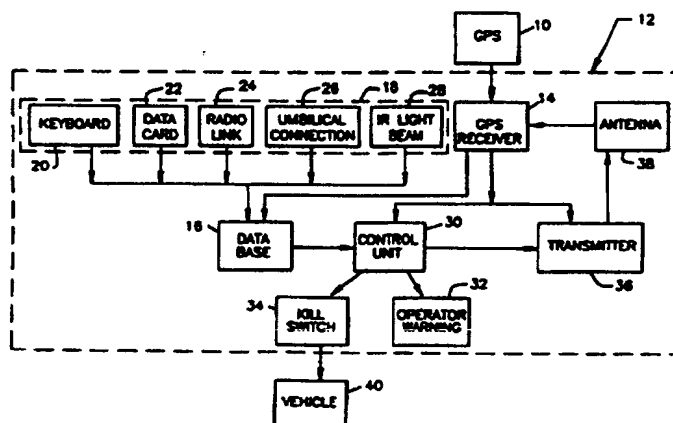

## (57) Abstract

The apparatus (12) comprises a GPS receiver (14) for receiving radio signals indicative of the current ground position coordinates of the ground vehicle to which the GPS receiver is coupled. A data base (16) stores ground position coordinates indicative of at least one bounded area of permitted operation for the ground vehicle. A control unit (30) is responsive to the GPS receiver (14) and the data base (16) for comparing the stored coordinates with the current coordinates to determine if the vehicle is outside of the bounded area of permitted operation. A kill switch (34) disables the vehicle when it is outside of the bounded area of permitted operation. A warning light/buzzer (32) can be triggered prior to the activation of the kill switch (34) to warn the operator that the vehicle is about to be disabled.

BEST AVAILABLE COPY

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

**APPARATUS AND METHOD FOR MONITORING AND BOUNDING  
THE PATH OF A GROUND VEHICLE**

**TECHNICAL FIELD OF INVENTION**

This invention relates generally to ground vehicles and more particularly to a method and apparatus for monitoring and bounding the path of a ground vehicle using a Global Positioning System (GPS).

**BACKGROUND ART**

Ground vehicles such as automobiles, trucks, buses, construction equipment, motor boats, rail vehicles, etc., have intrinsic limits of travel. The travel limits of road operated ground vehicles such as automobiles, trucks, and buses which are generally defined by the vehicle's fuel or electrical capacity and/or terrain conditions. For instance, ground vehicles which run on electricity and are operated without on-board stored energy cannot go beyond the limits of their power distribution system. An example of such a vehicle is the trackless trolley bus used for public transportation.

The intrinsic travel limitations of other types of ground vehicles are more defined. For example, the travel boundaries of rail vehicles are limited to areas where there are rails.

5           Regardless of the type of ground vehicle, such travel limitations offer very imprecise operating boundaries for these vehicles.

          In the past, efforts have been made to limit vehicle entry and operation to authorized persons using mechanical  
10   key-locks or the electronic equivalent, such as keyless entry systems and code numbers. Further, there are anti-hijack systems for trucks transporting high value cargo. These systems report the truck's location and may be driver activated if the driver is threatened.

15   None of these systems, however, are capable of preventing authorize persons from operating the vehicle in unauthorized location or at an unauthorized time.

          Prior efforts have also been made to set travel boundaries for domestic pets and animals. Systems have  
20   been designed which enable an owner to confine a pet within the owner's yard using a collar that delivers an electrical shock to the pet if the pet leaves the yard. The boundaries of the yard can be defined in many different ways depending on the system used. Some systems  
25   use a buried electrical cable to define the boundaries of

the yard. Other systems use local radio or infrared transmitter, or photoelectric cells to define the limits of the yard.

5 Systems have also been developed for monitoring the travel of human beings. Specifically, electronic monitoring systems are now in use for monitoring prisoners held in home detention. An electronic device attached to the prisoner communicates with a base station usually tied to the telephone system. If the base cannot communicate  
10 with the unit attached to the prisoner, the base station calls a number and sends a "prisoner has escaped message."

Previously described monitoring and bounding methods for humans and pets are not suitable for wide ranging  
15 motor vehicles, since they are too localized.

In order to precisely monitor and define the operating boundary of a ground vehicle, the present invention utilizes a Global Positioning System (GPS) and a GPS receiver.

20 The Global Positioning System (GPS), as exemplified by NAVSTAR/GPS, is an accurate, three-dimensional navigation system. The GPS consists of a constellation of twenty one satellites and three spares that orbit the earth twice a day at an altitude of 10,898 miles. The  
25 satellites orbit the earth in six overlapping orbital

planes which are based on the equatorial plane of the earth. The orbits of the satellites enable any GPS receiver near the surface of the earth to receive signals from at least four satellites at any one time, although  
5 precise position information can be obtained with only three satellites. A GPS receiver can be located in mobile units such as aircraft or ground vehicles to enable them to precisely locate their global positions. Each satellite continuously broadcasts pseudo-random codes at  
10 L-band frequencies, L1 at 1575.42 Mhz and L2 at 1227.6 Mhz. Each satellite broadcasts a slightly different signal and each satellite broadcasts two types of signals. One of these signals is referred to as C/A code, which is a signal that can be received by civilian type GPS  
15 receivers. The other signal is referred to as P code, which is a signal that can be received only by military type GPS receivers. Ground stations on the earth receive transmissions from the satellites. These transmissions are analyzed and GPS time is compared with universal  
20 standard time at the ground stations. Corrections are transmitted to receivers in each of the satellites from the ground station. The signals which include the time the signal left the satellite, are broadcast from the satellites and decoded by the GPS receiver using  
25 triangulation techniques provided by software in the

receiver to determine the location. Specifically, the interval between the transmission and the reception of the satellite signal is used to calculate the unit's distance from each of the satellites being used. Those distances  
5 are used in the algorithms to compute the receiver's position. The NAVSTAR GPS was originally designed for military use by the Department of Defense, however, it is now authorized for limited civilian use.

A major benefit of the GPS is that the number of  
10 users is unlimited because the signals transmitted by the satellites are passively acquired. Thus, broad civilian and commercial applications are possible.

GPS receivers are presently employed in automobile and truck GPS navigation systems which comprise moving map  
15 displays that aid driver navigation or provide route advice. In some applications, these systems record the path and report to a central authority, however, these systems are not capable of bounding the path of the vehicle.

20 It is, therefore, the primary object of the present invention to provide an apparatus and method for monitoring and bounding the path of a ground vehicle in order to prevent authorize persons from operating the vehicle in unauthorized location or at an unauthorized  
25 time.

**DISCLOSURE OF THE INVENTION**

An apparatus and method for monitoring and bounding the path of a ground vehicle. The apparatus comprises a GPS receiver for receiving radio signals from a Global Positioning System which are indicative of the current ground position coordinates of the GPS receiver and thus, are the current ground position coordinates for the ground vehicle also when the GPS receiver is coupled to the vehicle. The apparatus also includes a data base for storing ground position coordinates which are indicative of at least one bounded area of permitted operation for the ground vehicle. A control unit which is responsive to the GPS receiver and the data base, is provided for comparing the stored ground position coordinates with the current ground position coordinates in order to determine if the ground vehicle is outside of the bounded area of permitted operation. A kill switch mechanism is provided for disabling the ground vehicle when the current ground position of the ground vehicle is outside of the bounded area of permitted operation.

**BRIEF DESCRIPTION OF THE DRAWINGS**

For a detailed understanding of the present invention, reference should be made to the following



detailed description taken in conjunction with the accompanying drawings wherein:

FIG. 1 is a block diagram which illustrates the functional components of the ground vehicle bounding and monitoring system of present invention;

FIG. 2 is a flow chart which illustrates the operation of the control unit of present invention;

FIG. 3 shows a schematic diagram of a ground vehicle monitored in accordance with the present invention.

10

#### **BEST MODE FOR CARRYING OUT THE INVENTION**

Referring to FIG. 1 there is shown a block diagram which illustrates the functional components of the ground vehicle bounding and monitoring system 10 of present invention.

15

The system 12 comprises a GPS receiver 14 which converts GPS or differential GPS radio signals received from the earlier described GPS 10 into the surface coordinates of the current receiver location. Persons of ordinary skill in the art should recognize that differential GPS refers to a technique that overcomes the effects of environmental errors and Selective Availability on the GPS signals to produce a very accurate fix on the receiver's position.

20

In any case, the GPS receiver 14 is adapted to be installed in any type of engine or motor driven ground vehicle 40. Since the GPS receiver 14 is installed in the vehicle 40, the surface coordinates of the current receiver location are also the ground vehicle's coordinates. The GPS receiver 14 can be permanently installed in the vehicle or be portable. If the GPS receiver 14 is portable, it should be located so it can be easily accessed and removed if desired by authorized person only. Furthermore, any suitable GPS receiver hardware can be employed in the present invention.

The system 12 also includes a data base 16 for storing permitted surface coordinates in any well known manner. The data base 16 can be an integral portion of the receiver 14 or a separate component. In either case, the permitted surface coordinates can be stored as a bit-map or be used as coefficients for an algorithm that calculates the boundary of the permitted area.

The data base 16 includes data entry means 18 for loading the permitted surface coordinates into the data base 16. In one embodiment of the invention, the data entry means is provided by the GPS receiver as the vehicle moves along a permitted route. In this embodiment, the receiver operates in a learning mode to learn the permitted surface coordinates as the vehicle moves along

the permitted route. In another embodiment of the present invention, the data entry means is provided by a keyboard which is coupled to the data base. The keyboard enables the user to type the permitted surface coordinates into the data base. It is also contemplated that the data entry means can take the form of some type of data card such as a magnetic stripe or smart card or ROM card the operation of which will be explained later. Further, any other type of well known data entry mechanism can be used including a radio link, a temporary umbilical connection and/or an infrared light beam. In the preferred embodiment shown in FIG. 1, the data entry means includes many of the techniques described above including a keyboard 20, a data card 22, a radio link 24, means for accepting an umbilical connection 26, and IR light beam 28 capability. It should be understood, however, that any combination of data entry means could be included in a working embodiment of the present invention.

A control unit 30 is also provided in the system 12 of the present invention. The control unit 30 can be an integral part of the receiver 14 of a separate component. The control unit 30, in either case, is coupled to the outputs of both the GPS receiver 14 and the data base 16. The control unit 30 includes software and/or hardware that operates to compare the current surface coordinates

generated by the GPS receiver 14 with the permitted surface coordinates stored in the data base 16 as will be explained later in greater detail. In the preferred embodiment shown in FIG. 1, the control unit 30 is coupled  
5 to operator warning means 32 which can form a portion of the receiver 14, a separate component or be portion of the vehicle 40. Regardless of the form it takes, the operator warning means 32 can comprise a warning light, a warning buzzer, or an audible and/or visible warning, all of which  
10 are intended to warn the operator that he or she has strayed from the permitted route and that the vehicle is about to be disabled.

The output of the control unit 30 is coupled to a kill switch 34 which operates to disable the vehicle 40 by  
15 shutting down the vehicle's engine or motor. The kill switch 40 can be coupled to either the electrical circuits of the vehicle or the electro-mechanical components that selectively control the operation of the vehicle's ignition and fuel system. The controlled deactivation of  
20 such circuits and components by a kill switch is well known in the automobile anti-theft art.

The system of the present invention can optionally include a transmitter 36 and is included in the preferred embodiment shown in FIG. 1. The transmitter 36 of the  
25 present invention is adapted to send the vehicle's surface

coordinates to either internal or external storage. The transmitter 36 can be summoned to send the vehicle's coordinates either continuously as received from the GPS receiver 14 or only upon the control unit 30 producing a  
5 "fail-to-match condition".

The system 12 of the present invention further comprises an antenna 38 which is coupled to the receiver 14. The antenna 38 enables the system 12 to receive and transmit radio signals. Such antennas are well known in  
10 the art of GPS receivers.

The system 12 of the present invention, operates to continuously compare the vehicle's current ground location with a permitted vehicle location data stored in the on-board data base 16. If the two location values do not  
15 agree, the kill switch 34 disables the vehicle's engine or motor.

Since the system 12 of the present invention operates in conjunction with the GPS 10, the present invention has global coverage. Additionally, a vehicle equipped with  
20 the present invention does not have to use roads or tracks for the invention to function.

According to the present invention, a permitted position may consist of an area as small as a ten meter radius about the current vehicle position. On the other  
25 extreme, permitted positions can be as large as the whole

earth but more usefully, they can be selected states, counties, highways, and military reservations and/or warehouses. The permitted positions may consist of a series of coordinates along a given path which extends  
5 between a starting point and an ending point. Such a path may be as narrow as ten meters.

A permitted position may be limited by time. This insures that the vehicle arrives or leaves a given position within a pre-determined time limit.

10 In all the scenarios described above, the penalty for failure to remain within a permitted area is engine/motor shut-down and in some applications, transmission of the final position by the optional transmitter 36.

Referring now to FIG. 2 a flow chart is shown which  
15 illustrates the operation of the control unit 30 of present invention. The operation of the control unit can be implemented using primarily software, although portions may be implemented by well known hardware components. Starting at the top of the flow chart with first step 42  
20 that the control unit reads the receiver's current surface coordinates and box 44 indicates that the control unit reads the permitted surface coordinates stored in the data base. In the next step 46, the control unit compares both sets of coordinates to determine if the current surface  
25 coordinates match the permitted surface coordinates. In

step 48, if both sets of coordinates match, the control unit repeats steps 42-46 with an updated set of current surface coordinates. However, if the current surface coordinates fail to match the permitted surface coordinates, the control unit then performs step 50 which involves determining whether the operator of the vehicle has been warned that the vehicle is about to be disabled within a selected time period. This selected time period is approximately equal to the duration of the time delay which will be described shortly. If no warning has been issued within the selected time period, the next step performed by the control unit involves sending a signal to the vehicle warning means which includes a time delay feature as shown in box 52. The duration of the time delay can vary depending upon the application. For example, the time delay can be long enough to allow the operator to return the vehicle to the permitted area. In another example, the time delay will only be long enough to allow the operator to remove the vehicle from the road. In any case, once the time delay has elapsed, the process of steps 42-50 repeats itself. If the current receiver coordinates remain outside of the permitted boundary and the operator has been warned within a selected time period, the control unit performs step 54 which is to send a signal to the kill switch mechanism to disable the

vehicle. Once the vehicle has been disabled, the control unit sends the final location coordinates of the disabled vehicle to either internal or external storage via the transmitter as shown in step 56.

5           As one of ordinary skill will ascertain, the present invention has many possible applications. One potential application is in the area of vehicle theft prevention. In such an application, the authorized operator of the vehicle would have a password which disables the system.

10       The data base would be loaded with permitted surface coordinates that would not allow the vehicle to operate outside of a very small region. The region might be the commute route to and from work and home as shown in FIG. 3. FIG. 3 shows a vehicle 40 traveling on a commute route

15       58 which is monitored by the GPS satellites 64. If the vehicle 40 is operated outside of the permitted region 60 shown bounded by boundary 62 imposed by the system of the present invention, the system would transmit such

20       operation to a central monitoring station operated either privately or by the local police.

          Another potential application is in the area of cargo monitoring. Dangerous cargo or heavy cargo transported by a truck, often have restricted routes through populated areas. The route may also have certain time restrictions.

25       The hauling license for such routes often specify these



limits. Accordingly, the data entry means of the present invention could take the form of a ROM card. Actual route and time restrictions would be written to the card as the cargo truck travels along its route thereby documenting the route and travel times actually followed. The kill switch in such an application would operate as "real-time" enforcement. The current route information could be transmitted from the vehicle to an approaching gateway. If the current route information is not authorized, the gateway would operate to prohibit passage of the truck therethrough.

Still another application of the present invention involves facility security. In this application, the present invention could be implemented to allow a vehicle to travel freely about some areas of a military reservation while preventing the vehicle from accessing other restricted areas of the reservation. This could be accomplished in the present invention by issuing each potential operator of the vehicle with a ROM card individually tailored for each the respective operator with the appropriate clearances to enter different areas. Thus, one operator might be cleared to use the vehicle for the entire base while a different operator with a different card would be cleared to use the same vehicle in only selected areas.

Further, the military reservation could also be a warehouse where the vehicle would comprise a fork-lift truck. In such an application, the shipping documents for the goods to be stored in the warehouse would include a  
5 ROM card with locator information for the stored goods, the route, and the area and the route that the fork-lift is permitted to travel written thereto.

The present invention can also be used in toll road and bridge billing applications. In such applications,  
10 the data entry means would comprise a pre-purchased card which would operate to grant a predetermined number of uses of a particular route and at a time dependent cost.

It should be understood that the embodiments described herein are merely exemplary and that a person  
15 skilled in the art may make many variations and modifications to these embodiments utilizing functionally equivalent elements to those described herein. Any and all such variations or modifications as well as others which may become apparent to those skilled in the art, are  
20 intended to be included within the scope of the invention as defined by the appended claims.

CLAIMS

What is claimed is:

1. An apparatus for monitoring and bounding the  
5 path of a ground vehicle, comprising:

GPS receiver means for receiving radio signals  
from a Global Positioning System which are indicative of  
the current ground position of said GPS receiver means,  
whereby said current ground position is also the ground  
10 vehicle's current ground position when said GPS receiver  
means is coupled thereto;

data base means for storing data which is  
indicative of at least one bounded area of permitted  
operation for the ground vehicle;

15 computing means responsive to said GPS receiver  
means and said data base means, for determining if the  
current ground position is outside of said at least one  
bounded area of permitted operation; and

kill switch means responsive to said computing  
20 means for disabling the ground vehicle when the current  
ground position is outside of said at least one bounded  
area of permitted operation.

2. The apparatus according to claim 1, further  
25 comprising transmitter means responsive to said computing

means for transmitting the current ground position of said GPS receiver means to a ground vehicle monitoring area.

3. The apparatus according to claim 2, wherein  
5 said transmitter means transmits the current ground position continuously.

4. The apparatus according to claim 2, wherein  
said transmitter means transmits the current ground  
10 position when the current ground position is outside of said at least one bounded area of permitted operation.

5. The apparatus according to claim 1, wherein  
said data base means includes data entry means for loading  
15 data which is indicative of said at least one bounded area of permitted operation into said data base means.

6. The apparatus according to claim 5, wherein  
said data entry means includes learning mode means  
20 associated with said GPS receiver means for enabling said GPS receiver means to operate as a source for said data as the ground vehicle moves along within said at least one bounded area of permitted operation.

7. The apparatus according to claim 5, wherein said data entry means includes keyboard means for entering said data into said data base means.

5           8. The apparatus according to claim 5, wherein said data entry means includes data card means for entering said data into said data base means.

10           9. The apparatus according to claim 5, wherein said data entry means includes radio link means for entering said data into said data base means.

15           10. The apparatus according to claim 5, wherein said data entry means includes umbilical connection means for entering said data into said data base means.

20           11. The apparatus according to claim 5, wherein said data entry means includes infrared light means for entering said data into said data base means.

25           12. The apparatus according to claim 1, wherein said data base means includes a bit map of permitted ground position coordinates which are indicative of said at least one bounded area of permitted operation for the ground vehicle.

13. The apparatus according to claim 1, wherein said data base means includes an algorithm that calculates said at least one bounded area of permitted operation for the ground vehicle.

5

14. The apparatus according to claim 1, wherein said kill switch means includes means for warning an operator of the ground vehicle, that said ground vehicle is being disabled.

10

15. A method for monitoring and bounding the path of a ground vehicle using a Global Positioning System, comprising the steps of:

15 locating the current ground position of said ground vehicle using radio signals transmitted by said Global Positioning System which are received by GPS receiver means associated with said ground vehicle, whereby said transmitted radio signals are indicative of the current ground position of said ground vehicle;

20 determining whether the current ground position of said ground vehicle is outside of a predetermined bounded area of permitted operation; and

25 disabling said ground vehicle when the current ground position is outside of said predetermined bounded area of permitted operation.

16. The method according to claim 15, further comprising the step of transmitting the current ground position of said ground vehicle to a ground vehicle monitoring area.

5

17. The method according claim 15, wherein said step of determining whether the current ground position of said ground vehicle is outside of a predetermined bounded area of permitted operation includes the steps of:

10

storing said predetermined bounded area of permitted operation in data base means; and

comparing the current ground position of said ground vehicle to said predetermined bounded area of permitted operation stored in said data base means.

15

18. The method according to claim 17, wherein said step of storing includes entering said predetermined bounded area of permitted operation in said data base means using data entry means.

20

19. The method according to claim 15, further comprising the step of warning an operator of said ground vehicle that said ground vehicle is about to be disabled before said step of disabling.

25

20. An apparatus for monitoring and bounding the path of a ground vehicle, comprising:

a GPS receiver for receiving radio signals from a Global Positioning System which are indicative of the current ground position coordinates of said GPS receiver, 5 whereby said current ground position coordinates are also the ground vehicle's current ground position coordinates when said GPS receiver is coupled thereto;

data base means for storing ground position coordinates which are indicative of at least one bounded area of permitted operation for the ground vehicle; 10

computing means responsive to said GPS receiver and said data base means, which compares said stored ground position coordinates with the current ground position coordinates in order to determine if the ground vehicle is outside of said at least one bounded area of permitted operation; and 15

kill switch means responsive to said computing means for disabling the ground vehicle when the current ground position of the ground vehicle is outside of said at least one bounded area of permitted operation. 20

21. An apparatus for monitoring and bounding the path of a ground vehicle, comprising:



GPS receiver means for receiving radio signals from a Global Positioning System which are indicative of the current ground position of said GPS receiver means, whereby said current ground position is also the ground vehicle's current ground position when said GPS receiver means is coupled thereto;

data base means for storing data which is indicative of at least one mode of permitted operation for the ground vehicle;

computing means responsive to said GPS receiver means and said data base means, for determining if said ground vehicle is within said at least one mode of permitted operation; and

warning means responsive to said computing means for warning an operator of the ground vehicle, that said ground vehicle is going to be disabled when said computing means determines that said ground vehicle has traveled outside of said at least one mode of permitted operation.

22. The apparatus according to claim 21, wherein said operator warning means comprises a component of said GPS receiver means.

23. The apparatus according to claim 21, wherein said operator warning means comprises a component of said ground vehicle.

24. The apparatus according to claim 21,  
wherein said operator warning means comprises a warning  
light.

5           25. The apparatus according to claim 21,  
wherein said operator warning means comprises an audible  
buzzer.

10           26. The apparatus according to claim 21,  
wherein said operator warning means comprises a  
combination audible buzzer and warning light.

15           27. The apparatus according to claim 21,  
wherein said computing means includes means for delaying  
the disabling of said ground vehicle in order to allow the  
operator to bring said ground vehicle into compliance with  
said at least one mode of permitted operation.

20           28. The apparatus according to claim 21,  
further comprising transmitter means responsive to said  
computing means for transmitting the current ground  
position of said GPS receiver means to a ground vehicle  
monitoring area.

29. The apparatus according to claim 28,  
wherein said transmitter means transmits the current  
ground position continuously.

5           30. The apparatus according to claim 28,  
wherein said transmitter means transmits the current  
ground position when the current ground position is  
outside of said at least one mode of permitted operation.

10           31. The apparatus according to claim 21,  
wherein said data base means includes data entry means for  
loading data which is indicative of said at least one mode  
of permitted operation into said data base means.

15           32. The apparatus according to claim 31,  
wherein said data entry means includes learning mode means  
associated with said GPS receiver means for enabling said  
GPS receiver means to operate as a source for said data as  
the ground vehicle moves along within said at least one  
20           mode of permitted operation.

          33. The apparatus according to claim 31,  
wherein said data entry means includes keyboard means for  
entering said data into said data base means.

34. The apparatus according to claim 31,  
wherein said data entry means includes data card means for  
entering said data into said data base means.

5           35. The apparatus according to claim 31,  
wherein said data entry means includes radio link means  
for entering said data into said data base means.

10           36. The apparatus according to claim 31,  
wherein said data entry means includes umbilical  
connection means for entering said data into said data  
base means.

15           37. The apparatus according to claim 31,  
wherein said data entry means includes infrared light  
means for entering said data into said data base means.

20           38. The apparatus according to claim 31,  
further comprising kill switch means responsive to said  
computing means for disabling said ground vehicle when  
said computing means determines that said ground vehicle  
is outside of said at least one mode of permitted  
operation.

39. The apparatus according to claim 31, wherein said at least one mode of permitted operation comprises at least one bounded area on the earth.

5           40. The apparatus according to claim 39, wherein said data base means includes a bit map of permitted ground position coordinates which are indicative of said at least one bounded area of permitted operation for the ground vehicle.

10

41. The apparatus according to claim 40, wherein said data base means includes an algorithm that calculates said at least one bounded area of permitted operation for the ground vehicle.

15

42. The apparatus according to claim 41, wherein said at least one mode of permitted operation comprises at least one bounded time interval.

20

43. A method for monitoring and bounding the path of a ground vehicle using a Global Positioning System, comprising the steps of:

          locating the current ground position of said ground vehicle using radio signals transmitted by said  
25   Global Positioning System which are received by GPS

receiver means associated with said ground vehicle,  
whereby said transmitted radio signals are indicative of  
the current ground position of said ground vehicle;

5 determining whether the current ground position  
of said ground vehicle is outside of a predetermined mode  
of permitted operation; and

warning an operator of said ground vehicle, that  
said ground vehicle is going to be disabled when said  
ground vehicle has traveled outside of said at least one  
10 mode of permitted operation.

44. The method according to claim 43, further  
comprising the step of disabling said ground vehicle when  
said ground vehicle is outside of said at least one mode  
15 of permitted operation.

45. The method according to claim 44, further  
comprising the step of providing a predetermined duration  
of time for allowing the operator to bring said ground  
20 vehicle into compliance with said at least one mode of  
permitted operation prior to said step of disabling of  
said ground vehicle.

46. The method according to claim 43, wherein  
25 said at least one mode of permitted operation comprises

ground vehicle travel in at least one bounded area on the earth.

47. The method according to claim 46, further  
5 comprising the step of transmitting the current ground position of said ground vehicle to a ground vehicle monitoring area.

48. The method according to claim 47, wherein  
10 said step of determining whether the current ground position of said ground vehicle is outside of a predetermined mode of permitted operation includes the steps of:

storing said predetermined bounded area of  
15 permitted operation in data base means; and

comparing the current ground position of said ground vehicle to said predetermined mode of permitted operation stored in said data base means.

49. The method according to claim 48, wherein  
20 said step of storing includes entering said predetermined bounded area of permitted operation in said data base means using data entry means.

1/3

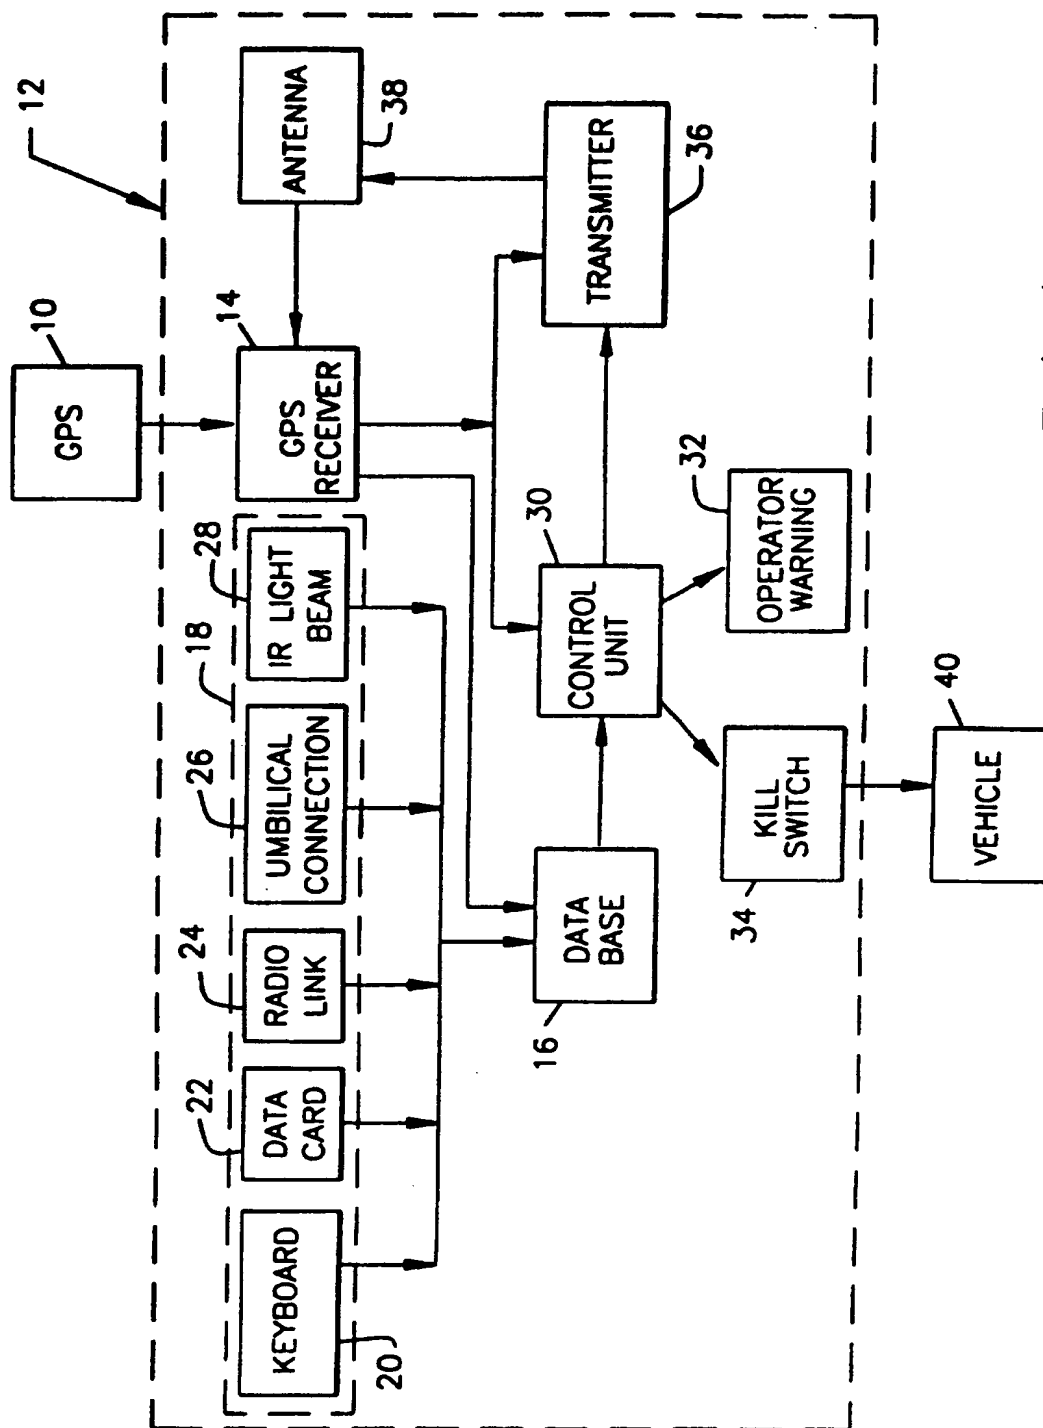


FIG. 1



2/3

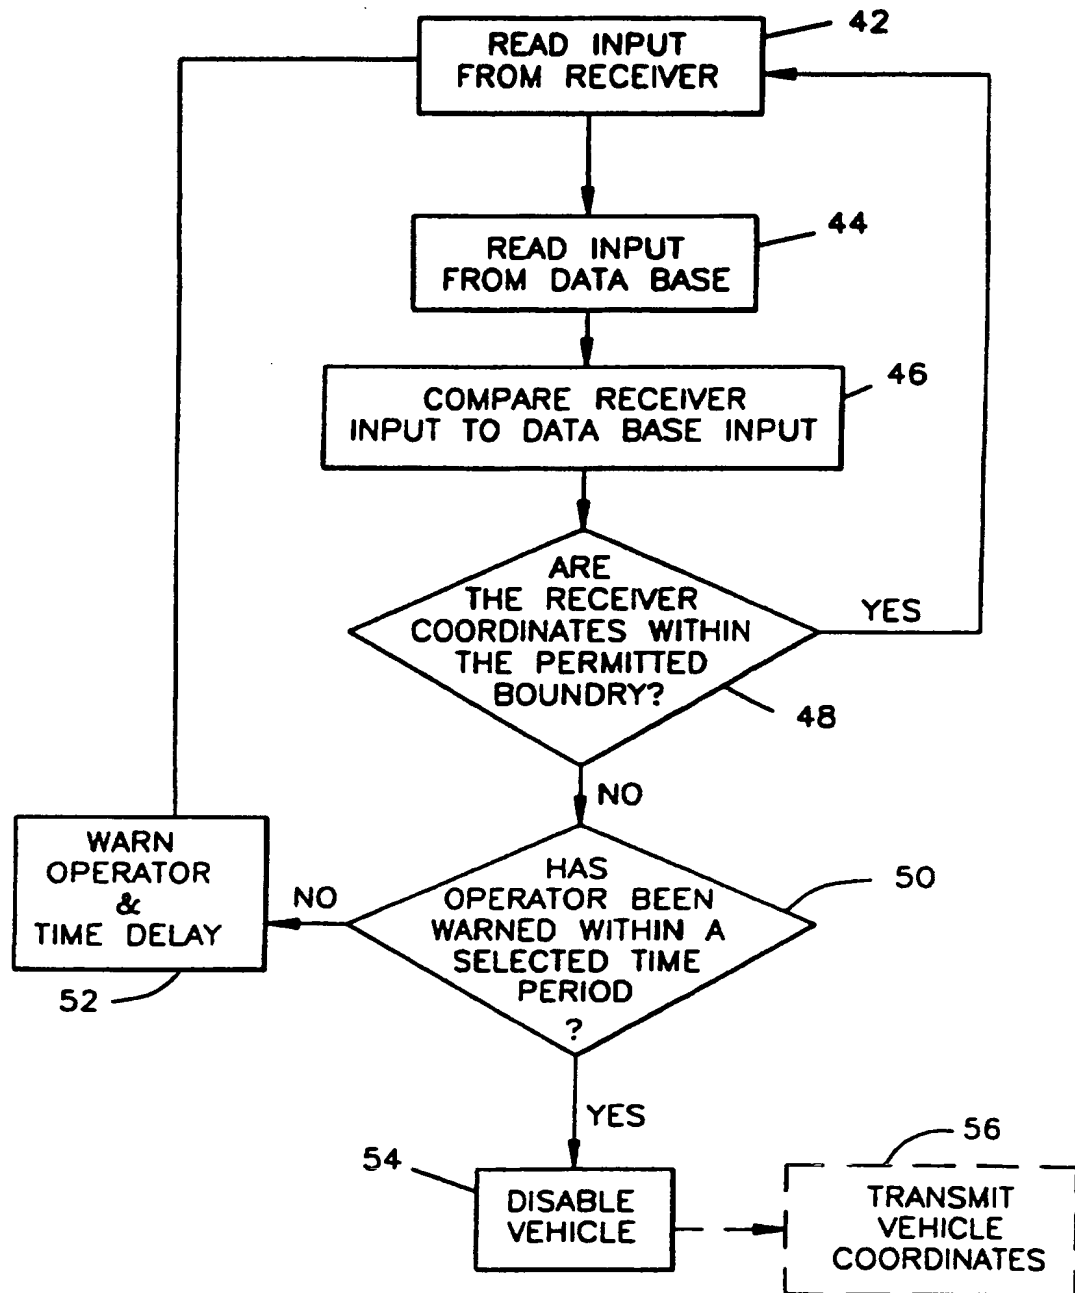
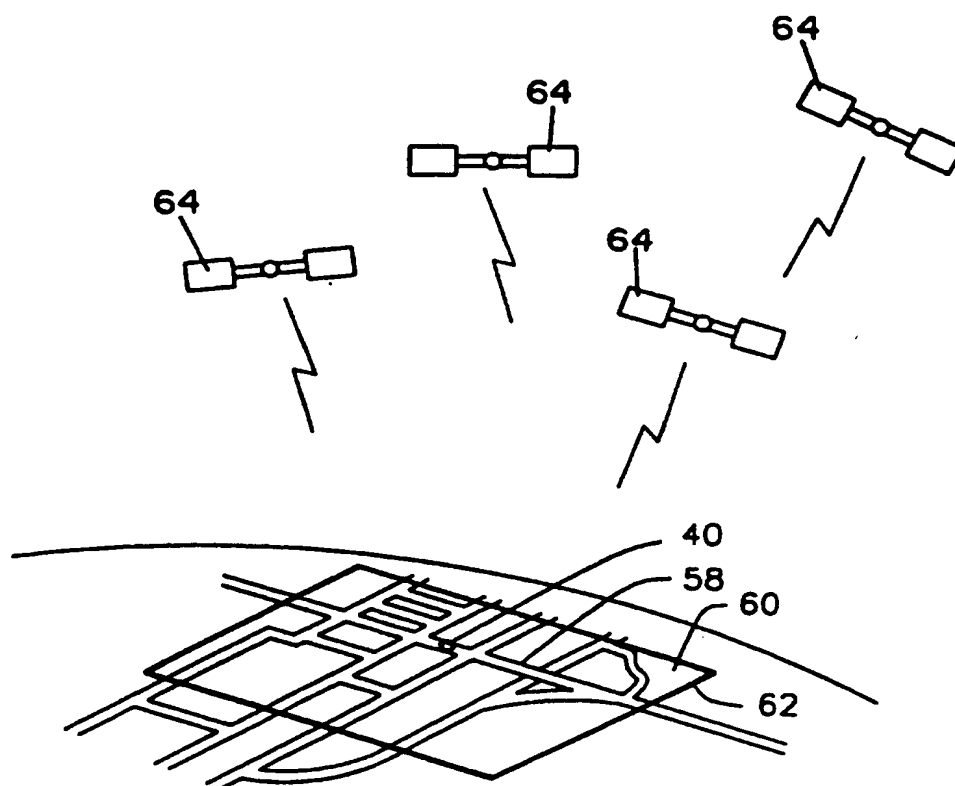


FIG. 2

**FIG. 3**

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US96/04509

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : G08G 01/123

US CL : 180/167; 340/989; 342/457; 364/449

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 180/167; 340/989; 342/457; 364/449

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 4,619,231 (STOLAR ET AL.) 28 October 1986.	1-49
A	US, A, 5,068,656 (SUTHERLAND) 26 November 1991.	1-49
A	US, A, 5,365,451 (WANG ET AL.) 15 November 1994.	1-49
A	US, A, 5,379,224 (BROWN ET AL.) 03 January 1995.	1-49
A,P	US, A, 5,442,805 (SAGERS ET AL.) 15 August 1995.	1-49
A,P	US, A, 5,515,043 (BERARD ET AL.) 07 May 1996	1-49

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:	
*A* document defining the general state of the art which is not considered to be part of particular relevance	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*E* earlier document published on or after the international filing date	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	*Z* document member of the same patent family

Date of the actual completion of the international search  
22 MAY 1996Date of mailing of the international search report  
11 JUN 1996Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Authorized officer

Glen R. Swann III

Facsimile No. (703) 305-3230

Telephone No. (703) 305-4384

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**